

TKG-104-MB-IP68-VESA-GREY

INDUPROOF
Advanced



TKG-104-MB-IP68-VESA-BLACK

INDUPROOF
Advanced



FEATURES

- Integrated mousebutton
- VESA-M5-boreholes (distance 75 x 75 mm)
- IP68 sealing, can be submerged into liquids
- Special coating for excellent mechanical and chemical resistance
- Conform to DIN EN 60601-1-2-2006 (directive 93/42/ EWG, annex IX)
- Can be cleaned and disinfected thoroughly
- Robust, durable silicone material

TECHNICAL DATA

Number of keys:	104
Keyswitch technology:	carbon contacts
Operating force:	1.2 N
Switch travel:	1.0 mm
Switching cycles:	2 mill. (per key)
Protection level (max):	IP68
Material (keypad):	silicone
Material (bottom panel):	plastic
Housing colour:	grey, black
Interfaces:	PS/2; USB
Operating temperature:	-20 °C to +60 °C
Storage temperature:	-25 °C to +70 °C
Weight:	735 g
Dimensions:	340 x 165 x 18.4 mm
Certification:	CE, FCC

TECHNICAL DATA MOUSEBUTTON

Operating principle:	Hall-sensor
Resolution:	800 dpi

TECHNICAL DATA VESA INSERT NUTS

Thread:	M5
Material:	1.5 mm steel
Recommended screw tightening torque:	3.60 Nm
Resistance to distortion:	8.47 Nm
Axial force:	3110 N

Cat.No.	Product description	Housing Colour	Interface	Layout
KG17225	TKG-104-MB-IP68-VESA-GREY-PS/2-DE	Grey	PS/2	German
KG17226	TKG-104-MB-IP68-VESA-GREY-PS/2-US	Grey	PS/2	US
KG17203	TKG-104-MB-IP68-VESA-GREY-USB-DE	Grey	USB	German
KG17204	TKG-104-MB-IP68-VESA-GREY-USB-US	Grey	USB	US
KG21245	TKG-104-MB-IP68-VESA-BLACK-PS/2-DE	Black	PS/2	German
KG19276	TKG-104-MB-IP68-VESA-BLACK-PS/2-US	Black	PS/2	US
KG19259	TKG-104-MB-IP68-VESA-BLACK-USB-DE	Black	USB	German
KG21212	TKG-104-MB-IP68-VESA-BLACK-USB-US	Black	USB	US

Other language versions/interfaces/configurations available on request.

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49(0)37468-660-0
Fax: +49(0)37468-660-66
E-Mail: info@gett.de
Internet: www.gett.de

Gett North America LLC



Suite 203M
2323 S. Voss Road, Houston, TX 77057
United States of America
Tel: +832 649 7822
E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.

Unit 8, 5/F, CRE centre,
No. 889 Cheung Sha Wan Road
Kowloon, Hong Kong
Tel: +852 3461 9789
E-Mail: info@gett-asia.com
Internet: www.gett-asia.com

gett.de
gett-group.com

TECHNICAL DRAWING

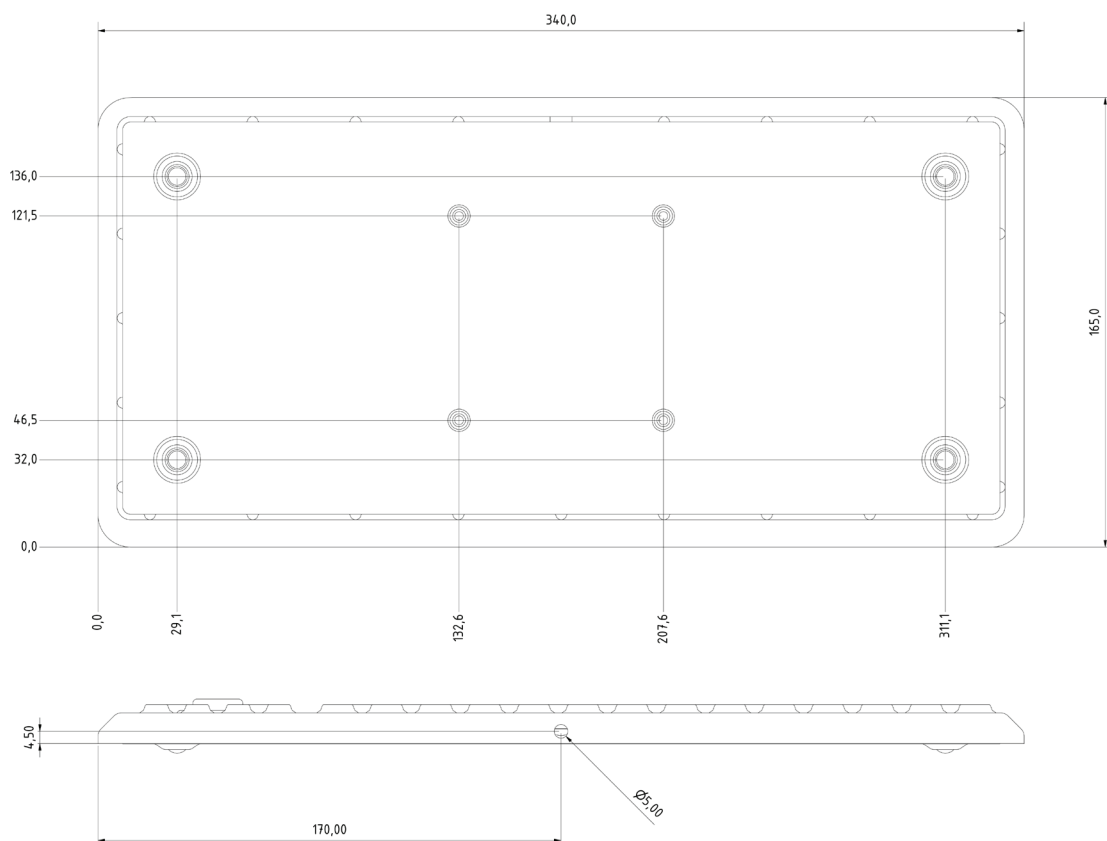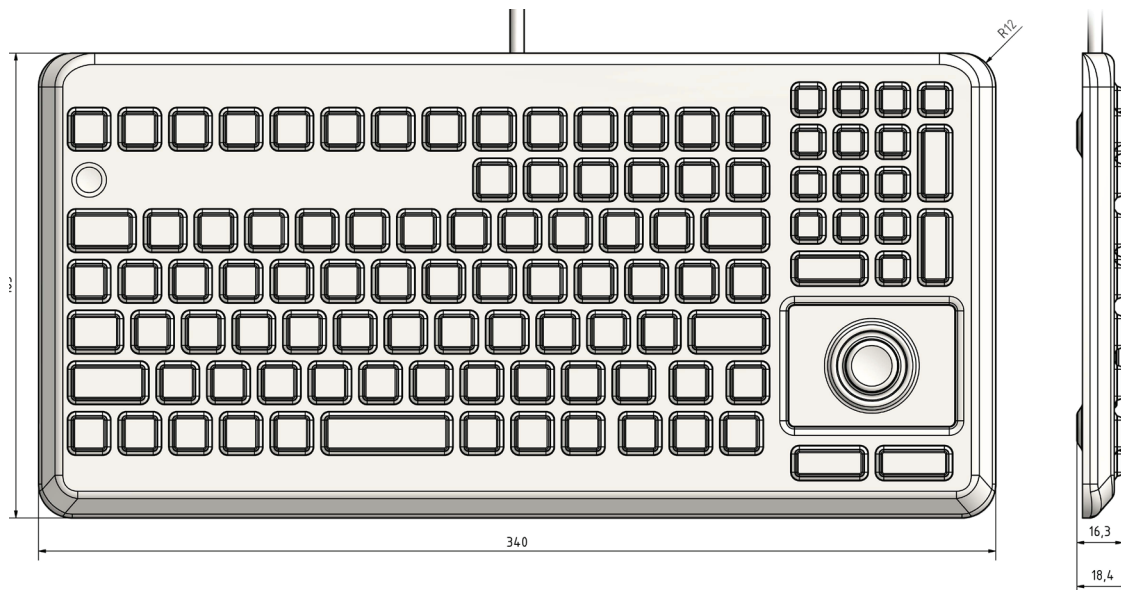

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49(0)37468-660-0
Fax: +49(0)37468-660-66
E-Mail: info@gett.de
Internet: www.gett.de

Gett North America LLC


Suite 203M
2323 S. Voss Road, Houston, TX 77057
United States of America
Tel: +832 649 7822
E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.

Unit 8, 5/F, CRE centre,
No. 889 Cheung Sha Wan Road
Kowloon, Hong Kong
Tel: +852 3461 9789
E-Mail: info@gett-asia.com
Internet: www.gett-asia.com

gett.de
gett-group.com


TECHNICAL DRAWING

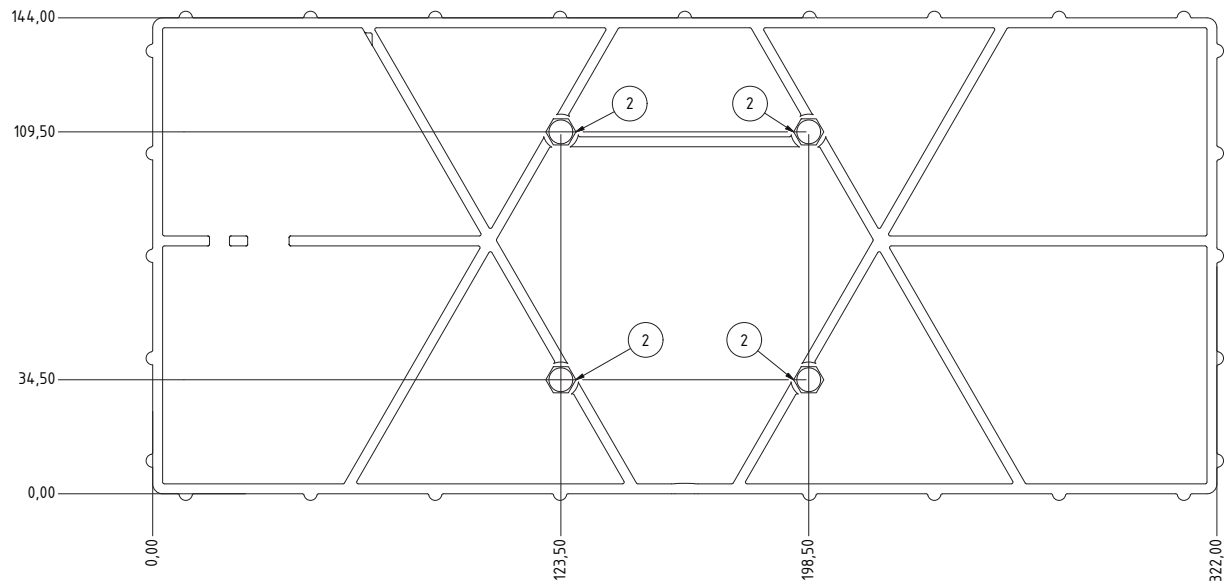

BAUTEILLISTE			
OBJEKT	ANZAHL	BAUTEILNUMMER	BESCHREIBUNG
2	4	BS0-M5-6	

SPECIFICATION

- Rear side integrated VESA screwing holes (distance 75 x 75 mm) can be opened neatly and burr-free by using a 5.2 mm drill; Plastic shavings can be removed with tweezers.
- The key lock allows for a cleaning even while the system is running (push the button 3 sec.)

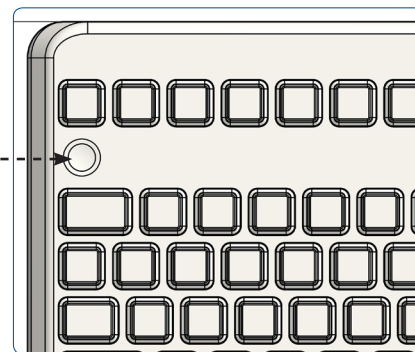

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49(0)37468-660-0
Fax: +49(0)37468-660-66
E-Mail: info@gett.de
Internet: www.gett.de

Gett North America LLC

Suite 203M
2323 S. Voss Road, Houston, TX 77057
United States of America
Tel: +832 649 7822
E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.

Unit 8, 5/F, CRE centre,
No. 889 Cheung Sha Wan Road
Kowloon, Hong Kong
Tel: +852 3461 9789
E-Mail: info@gett-asia.com
Internet: www.gett-asia.com

gett.de
gett-group.com