



FCS-4042 Version: 1

! Mounting kits are to be ordered separately.

HUBBLE PTZ Dom-IP-Netzwerk-Kamera, 2 Megapixel, 30fach Optischer Zoom, Innen / Außen, Zwei-Wege Audio, 802.3at PoE



1. Reset Button
2. Power LED

3. Memory Card Slot
4. Power Input

5. Ethernet Port
6. Audio Input

7. Audio Output
8. Digital Input/ Output

Key-features

- 2-Megapixel (1920 x 1080) HD-Auflösung
- 360° Dreh- und 190° Schwenkwinkel erlaubt eine große Anzahl an Sichtwinkeln
- Unterstützt 30fachen optischen Zoom
- WDR-Funktion (Wide Dynamic Range) zur Verbesserung des Bilds bei extreme dunkler oder heller Umgebung
- Bietet 3DNR (3-dimensionale Störungsunterdrückung) für ein extreme scharfes Bild auch unter schlechten Lichtbedingungen
- 3D Privacy Masks zum Schutz von privaten Arealen bei der Überwachung
- Entfernbare IR-Sperrfilter für Tag- und Nachtbeobachtungen
- Integrierter Micro-SDHC/SDXC-Karteneinschub zur lokalen Speicherung von Audio-/Videodaten
- Stromversorgung durch 24VAC Netzteil oder PoE (IEEE 802.3at)
- Wettergeschütztes IP-67 Gehäuse

- Kostenlose Überwachung und CMS-Softwarepakete (zentrales Managementsystem) mit 64-Kanal-Lizenz

Specifications

Systemeigenschaften

Standards & Protokolle:

IEEE 802.3 10-BASE-T, Ethernet
IEEE 802.3u 100-BASE-TX, Fast Ethernet
IEEE 802.3af Power over Ethernet (PoE)
IEEE 802.3at Power over Ethernet (PoE+)
TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv4/v6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour, Multicast, Ssupports 802.1x

Bildsensor:

2-Megapixel 1/2.8" Progressive Scan CMOS

Linse:

Zoom, DC iris, Auto focus, f4.3-129mm, F1.6-5.0

Buchse:

1 x RJ-45 10/100 Mbps PoE plus port
1 x Line In
1 x Line Out
1 x Power terminal block
I/O terminal block (4 DI/2 DO)
1 x MicroSDHC/ MicroSDXC card slot

Taster:

Reset Button

Indikator:

Power

IR Cut Filter:

Removable infrared-cut filter for day & night function

Verschlusszeit:

1/5 ~ 1/10,000 sec

Betrachtungswinkel:

66.4° - 2.61°

P/T/Z:

Pan range: 360°
Tilt range: -20° ~ 200°
30x Optical Zoom
16x Digital Zoom
Preset Point support up to 256 point
Auto pan mode
Auto patrol mode

Videokomprimierung:

H.264 / MJPEG

Auflösung:

2M (1920x1080)

Video Format:

RAW

Audiokomprimierung:

G.711

Leistungsaufnahme:

AC24V / 802.3at PoE

Energieverbrauch:

High PoE (IEEE802.3at) / 25.44 W (built-in heater and fan on), AC 24V / 31.5 W (built-in heater and fan on)

Datenrate:

10/100Mbps

Speicherkapazität:

SD/MicroSD memory card of up to 64GB

Funktionen

Allgemein:

Backup: MicroSDHC /MicroSDXC card slot for local storage

Sicherheit:

Alarm and Notification: Alarm: Motion Detection; Tampering Detection; Network Failure Detection; DI/DO

Notification: HTTP, FTP, SMTP

Access Control: Multi-level user access with password protection

IP address filtering

IEEE 802.1X network access control

HTTPS encrypted data transmission

Videofunktionen:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR), Extreme WDR (145dB)

- 3D Noise Reduction (3DNR)

- Flip & Mirror

- Portrait Mode

- Privacy Mask

- Time Stamp and Text Caption Overlay

Image Layout:

Streaming: Up to 4 video streams

Motion Detection: 10 Detection Zones

Audiofunktionen:

Streaming: 2-way audio

Input/Output: line input, line output

Leistung

Bildrate (fps):

30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240

Minimale Beleuchtung:

Color: 0.1 lux at F1.6

B/W: 0.05 lux at F1.6

Environment

Temperatur bei Betrieb (°C):

Operating: -40°C ~ 50°C (AC 24V with heater and fan)

0°C ~ 40°C (PoE Plus, without heater and fan)

Luftfeuchtigkeit bei Betrieb:

Operating: 10% ~ 85%



Einsatzort:
Wall Mount

Abmessungen

Abmessungen (W x D x H mm):

200 x 276 x 200 mm

Gewicht:

2500 g

Approval and Compliance

Zertifizierung:

CE, RoHS, FCC, ONVIF, IP67, IK09, NEMA 4X,UL

Gehäuse:

Weather proof IP67-rated housing

Vandal Resistant IK09-rated

andere:


Manufactured in ISO-9001 and ISO-14001 certified factory

andere

Unterstützte Browser:

Microsoft Windows 8/7/Vista/XP

Diagramm

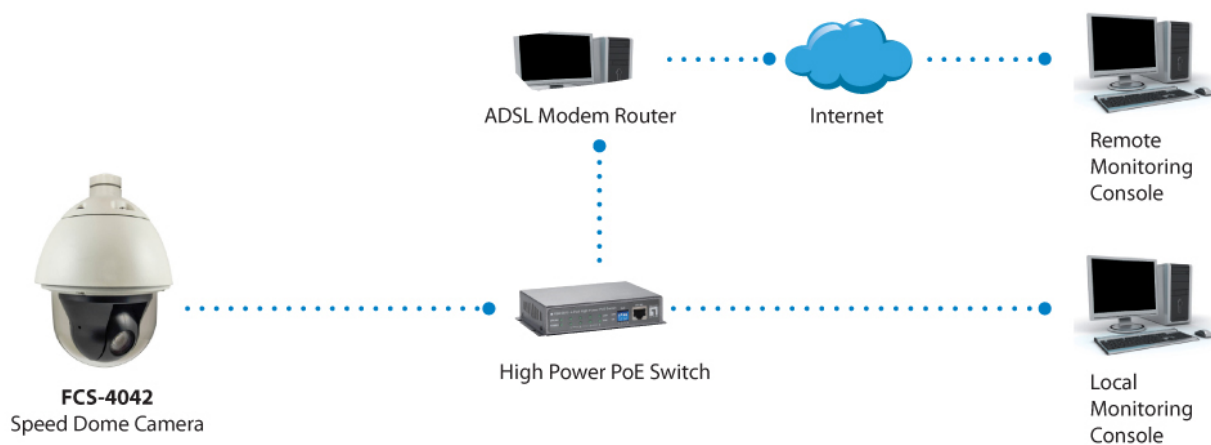

Order Information

FCS-4042

Package Contents

FCS-4042

Netzadapter

Stromkabel

Schraubenset

Quick Installation Guide

Ressource CD (Bedienungsanleitung, QIG)

Zubehör



CAS-2101
Hängesockel



CAS-2102
Hängebefestigung



CAS-2103
Hängebefestigung



CAS-2104
Verlängerungsrohr



CAS-2402
Eckmontagenhalterung



CAS-2503
Stangenmontagehalterung, Klemmbereich 5.25"-8.5"



CAS-2702
Outdoor Junction Box



CAS-4312
Wall Mount Bracket with Cable Management



No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.