



FCS-5068 Version: 1

Fixed Outdoor Network Camera, 5 Megapixel, IR-LEDs, two-way audio, 802.3af PoE, Varifocal

Key-features

- 5-Megapixel (2560x1920) HD-Auflösung
- Komprimierung: H.264/MJPEG
- Bietet WDR (Wide Dynamic Range) zur Verbesserung der Sichtverhältnisse bei extreme dunkler oder heller Umgebung
- Integrierte IR-LEDs für den Einsatz bei Nacht mit 30 m Reichweite
- Digitaler Ein-/Ausgang (1DI/1DO) für Sensor und Alarm
- Stromversorgungsunterstützung: PoE (IEEE 802.3af)
- Wettergeschütztes IP-66 Gehäuse
- 2,8 ~ 12 mm variable Brennweite für Weitwinkelbeobachtung

Specifications

System Specifications

Standards & Protocols:

IPv4, TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour

Image Sensor:

1/3" Progressive Scan CMOS

Connectors and Cabling:

RJ45 10M/100M Ethernet port

1 x alarm I/O

1 x audio I/O

1Vp-p composite output

Lens:

Vari-focus 2.8-12mm @ F1.4, CS-Mount lens socket

IR Cut Filter:

Yes

IR LED:

Max. 30 meter

**Shutter Time:**

1/3 s to 1/10,000 s

Betrachtungswinkel:

106°~35°

Videokomprimierung:

H.264+/H.264 / MJPEG

Resolution:

50Hz: 20fps (2560×1920), 25fps (2048×1536), 25fps(1920×1080), 25fps(1280×720)
60Hz: 20fps (2560×1920), 30fps (2048×1536), 30fps(1920×1080), 30fps(1280×720)

Video Format:

AVI

Audiokomprimierung:

G.711/G.722.1/G.726/MP2L2

64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)

Power Input:

DC12V ± 10%, PoE (802.3af)

Power Consumption:

Max. 5.5 W

Features

General:

5-Megapixel high resolution

PoE:

PoE (802.3af)

Security:

Password Protection, IP Address Filtering, Anonymous Access, Watermark

Video:

Motion Detection, Saturation, Brightness, Contrast adjustable by client software or web browser, Mirror, BLC, ROI, Dual Stream, Anti-Flicker, Privacy Mask

Audio:

G.711/G.722.1/G.726/MP2L2

64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)

Performance

Number of Clients:

20

Datenrate:

256 Kbps ~ 16 Mbps

Storage Capacity:

Built-in Micro SD/SDHC/SDXC slot, up to 128GB

Frame Rate:

50Hz: 20fps (2560×1920), 25fps (2048×1536), 25fps(1920×1080), 25fps(1280×720)
60Hz: 20fps (2560×1920), 30fps (2048×1536), 30fps(1920×1080), 30fps(1280×720)

Minimum illumination:

0.01Lux @ (F1.2, AGC ON), 0 Lux with IR

0.014Lux @ (F1.4, AGC ON), 0 Lux with IR

Environment

Temperatur (°C):

-30 °C – 60 °C (-22 °F – 140 °F)

Luftfeuchtigkeit (nicht kondensierend):

Humidity 95% or less (non-condensing)

Physical Specifications

Abmessungen (W x D x H mm):

95x105x258.6 mm (3.74" x 4.13" x 10.18")

Gewicht:

1200

Color:

White

Approval and Compliance

Zertifizierung:

CE,FCC,UL

Gehäuse:

IP 66

Others:

ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI

Others


Operation Systems:

Windows 10/8/7/XP

Viewing Systems:

IE above 9.0 above

Diagramm

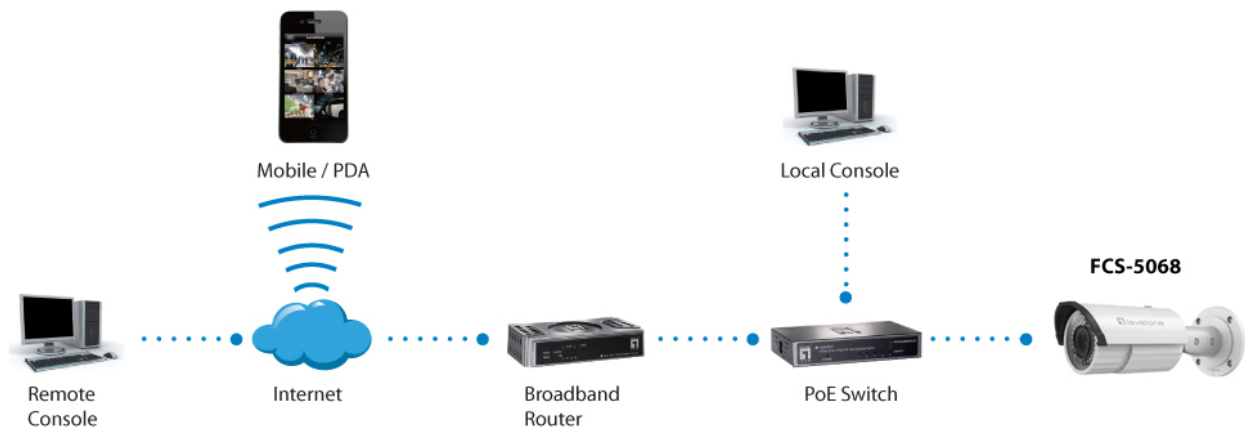

Order Information

FCS-5068



Package Contents

FCS-5068

Schraubenset

Ressource CD (Bedienungsanleitung, Hilfsprogramm, 64-Kanal Verwaltungssoftware)

Zubehör



CAS-7303

Vertical pole mount

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.