



ICY BOX IB-DK4040-CPD

USB Type-C™ Docking Station with two video interfaces

Key features

- Premium aluminium enclosure
- Data transfer, video/audio and Power Delivery via one Type-C™ cable
- Two video interfaces (HDMI® and VGA)
- High Speed HDMI® resolution up to 3840x2160@30 Hz
- VGA resolution up to 1920x1080P@60 Hz
- Three USB 3.0 Type-A interfaces, data transfer rate with up to 5 Gbit/s
- One Type-C™ charging port for Power Delivery 3.0 with up to 100 W, no data transfer
- SD 2.0 and microSD 2.0 single LUN card reader for most common card specifications
- 3.5 mm stereo combo jack (microphone / audio out)
- Gigabit LAN RJ45 interface with up to 10/100/1000 Mbit/s



Packing content
 IB-DK4038-CPD, manual
 No power supply included (only necessary for Power Delivery)

USB Type-C™ Notebook Docking Station

Docking Stations not only offer users a way to quickly transition from one working environment to another via a single cable, they can also add additional functionality and capabilities to notebook designs that are increasingly favoring form over function.

Technical data


Model	IB-DK4040-CPD
Article no.	60514
EAN code	4250078168966
Brand	ICY BOX
Colour	Anthracite / black
Material	Aluminium + plastic
Input interface	USB Type-C™ to host computer, integrated cable, 20 cm
Output interface	1x High Speed HDMI® Type-A 1x VGA 3x USB 3.0 Type-A 1+1 SD/microSD 2.0 1x Gigabit LAN RJ45 interface 1x 3.5 mm stereo combo jack (microphone in / audio out) 1x Type-C™ charging port for Power Delivery 3.0 up to 100 W (20 V@5 A), no data transfer
Video resolution	High Speed HDMI® up to 1x 3840x2160@30 Hz VGA up to 1920x1200@60 Hz

Data transfer rate	USB 3.0: up to 5 Gbit/s, UASP supported LAN: up to 10/100/1000 Mbit/s SD 2.0 / microSD 2.0: up to 480 MBit/s
Power supply	Bus powered
Power Delivery	Supports up to 100 W from original power supply of the computer
Operating system	Windows® 10, macOS®
System requirements	USB Type-C™ enabled Windows® / macOS® computer, DisplayPort™ Alt Mode and Power Delivery support required! Supports only SST (Single Stream Protocol) Dual video output: HDMI® and VGA synchronous display (only mirrored) Single-LUN - the card reader can only work with one memory card at a time The device is compatible with Thunderbolt™ 3 equipped computers

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. The terms HDMI® and HDMI® High-Definition Multimedia Interface, and the HDMI® logo are trademarks or registered trademarks of HDMI® LA, Inc. in the United States and other countries.



ICY BOX IB-DK4040-CPD USB Type-C™ DockingStation with two video interfaces

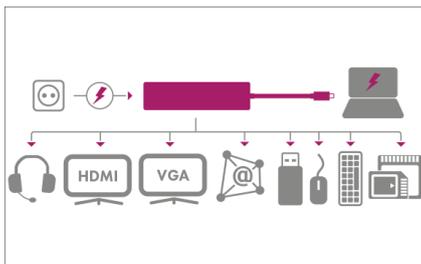

USB Type-C™

The Type-C™ connection offers incredible versatility. It combines data transmission, video output and power in a single, compact port. The integration of USB Type-C™ makes the connection even more practical, as it has a twist-proof connection as its physical feature - making it a truly universal connection.



Easy connection - multiple benefits

Perfectly combines high-quality appearance and efficient technology with a very compact size. The premium aluminium DockingStation does not only look good but also offers high comfort while using. This solution is suited for any location such as private or office areas.



Always informed

The IB-DK4040-CPD provides two different video interfaces and enables you to connect a HDMI® and VGA device simultaneously in mirror mode.

Logistical data

Packing unit:	60 pcs./carton
Total weight:	10.7 kg/carton
Gross weight (with packing):	0.176 kg
Net weight:	0.164 kg

Dimension/carton:	460x330x280 mm
Dimension (with packing):	100x25x200 mm
Dimension of article:	115x60x17 mm
Country of origin:	China